




Timken bearing do Brasil

12 mm x 37 mm x 12 mm NTN 6301ZZ deep groove ball bearings

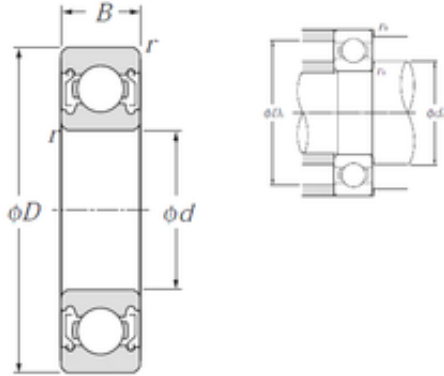

Bearing No. 6301ZZ

6301ZZ Bearing 2D drawings and 3D CAD models

Size	12x37x12 mm
Bore Diameter	12 mm
Outer Diameter	37 mm
Width	12 mm
d	12 mm
D	37 mm
B	12 mm
C	12 mm
rn	0,5 mm
r min.	1 mm
da min.	17 mm
da max	18,5 mm
Da max.	32 mm
ra max.	1 mm
Weight	0,06 Kg
Basic dynamic load rating (C)	9,7 kN
Basic static load rating (C0)	4,2 kN
(Grease) Lubrication Speed	20 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.06
EAN	4547359005288
Product Group	B00308



Timken bearing do Brasil

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	12MM Bore; 37MM Outside Diameter; 12MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6301ZZ/2ASU1
Weight / LBS	0.136
Outer Race Width	0.472 Inch 12 Millimeter
Bore	0.472 Inch 12 Millimeter
Outside Diameter	1.457 Inch 37 Millimeter
Other Features	Deep Groove Shell Alvania Prelubricated
Inner Race Width	0 Inch 0 Millimeter
bore diameter:	12 mm
precision rating:	ISO Class 0
outside diameter:	37 mm



Timken bearing do Brasil

finish/coating:	Uncoated
overall width:	12 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	12 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	12 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	20000 rpm
internal clearance:	CN
fillet radius:	1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	24000 RPM
dynamic load capacity:	9700 N
series:	63
static load capacity:	4200 N
manufacturer product page:	Click here