




Timken bearing do Brasil

5 mm x 14 mm x 5 mm NTN 605ZZ deep groove ball bearings

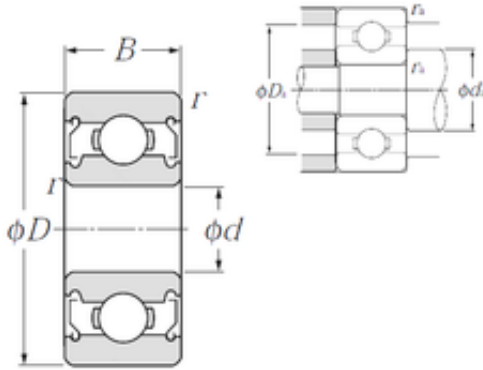

Bearing No. 605ZZ

605ZZ Bearing 2D drawings and 3D CAD models

Size	5x14x5 mm
Bore Diameter	5 mm
Outer Diameter	14 mm
Width	5 mm
d	5 mm
D	14 mm
B	5 mm
C	5 mm
r min.	0,2 mm
da min.	6,6 mm
da max	7,4 mm
Da max.	12,4 mm
ra max.	0,2 mm
Weight	3,9 Kg
Basic dynamic load rating (C)	1,33 kN
Basic static load rating (C0)	0,505 kN
(Grease) Lubrication Speed	39 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.003
EAN	4547359010503
Product Group	B00308
Enclosure	2 Metal Shields



Timken bearing do Brasil

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	5MM Bore; 14MM Outside Diameter; 5MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	605ZZ/1K
Weight / LBS	0.008
Outer Race Width	0.197 Inch 5 Millimeter
Outside Diameter	0.551 Inch 14 Millimeter
Bore	0.197 Inch 5 Millimeter
Other Features	Deep Groove Shell Alvania Prelubricated
Inner Race Width	0 Inch 0 Millimeter
bore diameter:	5 mm
precision rating:	ISO Class 0
outside diameter:	14 mm
finish/coating:	Uncoated



Timken bearing do Brasil

overall width:	5 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	5 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	5 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	39000 rpm
internal clearance:	CN
fillet radius:	0.2 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	46000 RPM
dynamic load capacity:	1330 N
series:	Micro
static load capacity:	505 N
manufacturer product page:	Click here